




ShockWater CarWash Systems
5 HP Delivery Pump & Processed Water Storage Tank Package

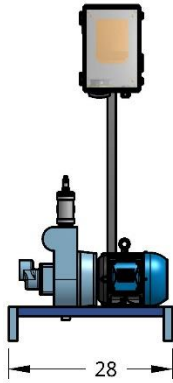

Front View

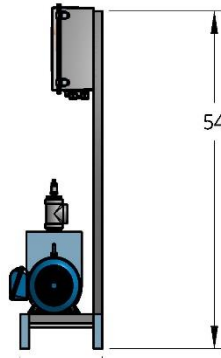

Side View



Top-Down View

Package Description

Two (2) 500 Gallon Cone Bottom Storage Tanks capture the ShockWater ReGenerated Water. The 5 HP Pump Skid delivers produced water under pressure to the various water demand equipment to the end of the carwash line, even with the fluctuating flow needs.

Package Specifications

5 HP self-priming pump –230/480 VAC 3 Phase ODP motor with cast-iron, self-priming centrifugal pump housing, 2.5" FNPT suction, 2" FNPT discharge, stainless steel impeller, with heavy duty ceramic seals.

Variable Frequency Drive - high efficiency, reliable drive with integrated controller to maintain desired system pressure. 4 – 20 mA signal feedback for control.

Pressure Transducer

Two (2) Cone Bottom Storage Tanks

Performance Data

Delivers 102 gpm at 50 psi.

500 Gallon Cone Bottom Tank

Quantity Needed Based on Wash Volume / Standard is Two (2)

